

General Description

The CJP6380 module is a highly integrated serial camera board that can be attached to a wireless or PDA host performing as a video camera or a JPEG compressed still camera. It provides a serial interface (RS-232) and JPEG compression engine to act as a low cost and low powered camera module for high resolution serial bus security system or PDA accessory applications.

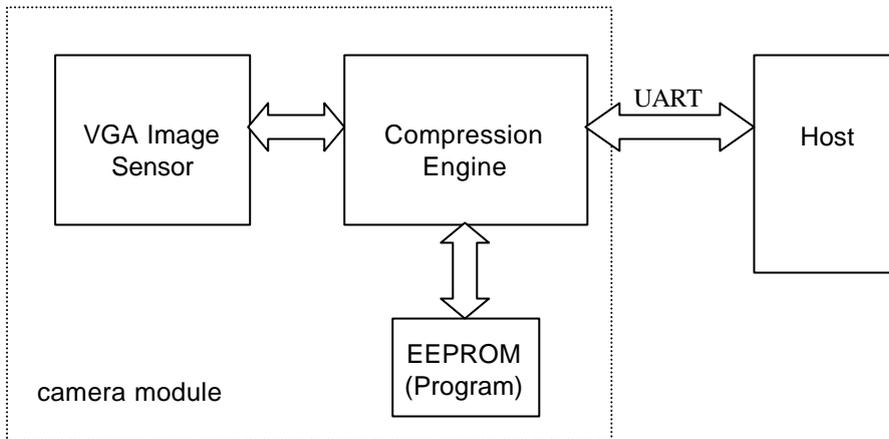


Figure 1 – System block diagram

Features

- Small in size, low cost and low powered (3.3V) camera module for high resolution serial bus security system or PDA accessory applications.
- On-board EEPROM provides a command based interface to external host via RS-232.
- UART: 115.2Kbps for transferring JPEG still pictures or 160x128 preview @8bpp with 0.75fps.
- On board VGA color sensor.
- Built-in JPEG CODEC for different resolutions.
- Built-in down sampling, clamping and windowing circuits for VGA, QVGA, 160x120 or 80x60 image resolutions.
- Built-in color conversion circuits for 2-bit gray, 4-bit gray, 8-bit gray, 8-bit RGB, 12-bit RGB, 16-bit RGB or standard JPEG preview images.
- No external DRAM required.

System Configuration

1. Camera Sensor
The CJP6380 module uses VGA color digital CameraChips with an 8-bit YCbCr interface.
2. Serial Bridge
The Serial Bridge is a JPEG CODEC embedded controller chip that can compress and transfer image data from CameraChips to external device. It takes 8-bit YCbCr 422 progressive video data from an CameraChip. The camera interface synchronizes with input video data and performs down-sampling, clamping and windowing functions with desired resolution, as well as color conversion that is requested by the user through serial bus host commands.
The JPEG CODEC can achieve higher compression ratio and better image quality for various image resolutions.
3. Program EEPROM
A serial type program memory is built-in for CJP6380 to provide a set of user-friendly command interfacing to external host.

Board Layout

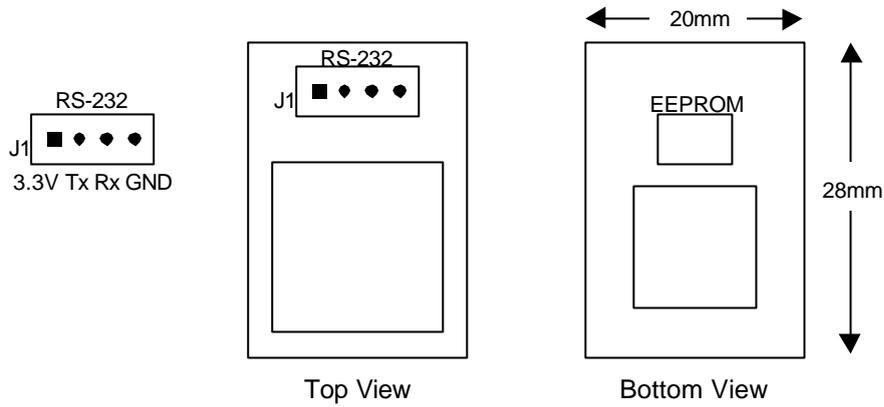


Figure 2 – CJP6380 board layout and serial interface pin

Serial Interface

1. Single Byte Timing Diagram

A single byte RS-232 transmission consists of the start bit, 8-bit contents and the stop bit. A start bit is always 0, while a stop bit is always 1. LSB is sent out first and is right after the start bit.

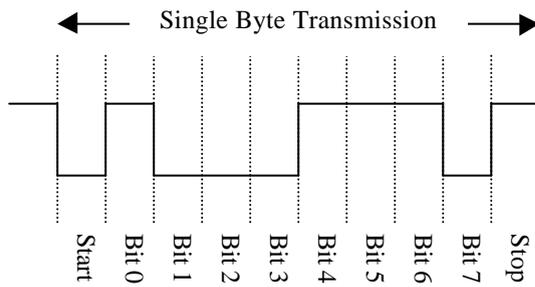


Figure 3 – RS-232 single byte timing diagram

2. Command Timing Diagram

A single command consists of 6 continuous single byte RS-232 transmissions. The following is an example of SYNC (AA0D00000000h) command.

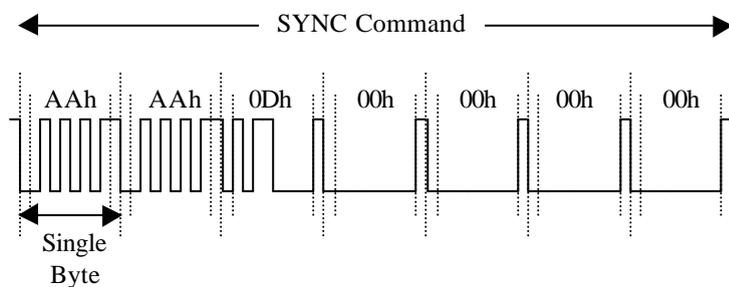


Figure 4 – RS-232 SYNC command timing diagram

Command Set

The CJP6380 module supports total 11 commands for interfacing to host as following:

Command	ID Number	Parameter1	Parameter2	Parameter3	Parameter4
Initial	AA01h	00h	Color Type	Preview Resolution	JPEG Resolution
Get Picture	AA04h	Picture Type	00h	00h	00h
Snapshot	AA05h	Snapshot Type	Skip Frame Low Byte	Skip Frame High Byte	00h
Set Package Size	AA06h	08h	Package Size Low Byte	Package Size High Byte	00h
Set Baudrate	AA07h	1st Divider	2nd Divider	00h	00h
Reset	AA08h	Reset Type	00h	00h	xxh*
Power Off	AA09h	00h	00h	00h	00h
Data	AA0Ah	Data Type	Length Byte 0	Length Byte 1	Length Byte 2
SYNC	AA0Dh	00h	00h	00h	00h
ACK	AA0Eh	Command ID	ACK counter	00h / Package ID Byte 0	00h / Package ID Byte 1
NAK	AA0Fh	00h	NAK counter	Error Number	00h

* If the parameter is 0xFF, the command is a special Reset command and the firmware responds to it immediately.

1. Initial (AA01h)

The host issues this command to configure the preview image size and color type. After receiving this command, the module will send out an ACK command to the host if the configuration success. Otherwise, an NACK command will be sent out.

1.1 Color Type

CJP6380 can support 7 different color types as follow:

2-bit Gray Scale	01h
4-bit Gray Scale	02h
8-bit Gray Scale	03h
8-bit Color	04h
12-bit Color	05h
16-bit Color	06h
JPEG	07h

1.2 Preview Resolution

80x60	01h
160x120	03h
320x240	05h
640x480	07h

1.3 JPEG Resolution

Since the Embedded JPEG Code can support only multiple of 16, the JPEG preview mode can support following image sizes. It is different from normal preview mode.

80x64	01h
160x128	03h
320x240	05h
640x480	07h

2. Get Picture (AA04h)

The host gets a picture from CJP6380 by sending this command.

2.1 Picture Type

Snapshot Picture	01h
Preview Picture	02h
JPEG Preview Picture	05h

3. Snapshot (AA05h)

CJP6380 keeps a single frame of JPEG still picture data in the buffer after receiving this command.

3.1 Snapshot Type

Compressed Picture	00h
Uncompressed Picture	01h

3.2 Skip Frame Counter


The number of dropped frames can be defined before compression occurs. “0” keeps the current frame, “1” captures the next frame, and so forth.

4. Set Package Size (AA06h)

The host issues this command to change the size of data package which is used to transmit image data from the CJP6380 to the host. This command should be issued before sending Snapshot command or Get Picture command to CJP6380. It is noted that the size of the last package varies for different image.

4.1 Package Size

The default size is 64 bytes and the maximum size is 512 bytes.

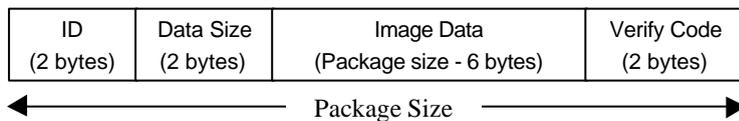

ID -> Package ID, starts from zero for an image

Data Size -> Size of image data in the package

Verify Code -> Simple error detection code, equals to the accumulated number of byte sent out from CJP6380 to host via RS-232

5. Set Baudrate (AA07h)

Set the CJP6380 baud rate by issuing this command. As the default baud rate is 14400bps, host should make connection with CJP6380 at this baud rate each time power on.

5.1 Baudrate Divider

Baudrate = 14.7456MHz / 2 x (2nd Divider + 1) / 2 x (1st Divider + 1)

Baudrate	1 st Divider	2 nd Divider
7200 bps	ffh	01h
14400 bps	7fh	01h
28800 bps	3fh	01h
57600 bps	1fh	01h
115200 bps	0fh	01h

6. Reset (AA08h)

The host reset CJP6380 by issuing this command.

6.1 Reset Type

“00h” resets the whole system. CJP6380 will reboot and reset all registers and state machines.

“01h” resets state machines only.

7. Power Off (AA09h)

CJP6380 will go into sleep mode after receiving this command. SYNC command (AA0Dh) must be sent to wake up CJP6380 for certain period until receiving ACK command from CJP6380

Data (AA0Ah)

CJP6380 issues this command for telling the host the type and the size of the image data which is ready for transmitting out to the host.

8.1 Data Type

Snapshot Picture	01h
Preview Picture	02h
JPEG Preview Picture	05h

8.2 Length

These three bytes represent the length of data of the Snapshot Picture, Preview Picture or JPEG Preview Picture.

9. SYNC (AA0Dh)

Either the host or the CJP6380 can issue this command to make connection. An ACK command must be sent out after receiving this command.

10. ACK (AA0Eh)

This command indicates the success of last operation. After receiving any valid command, ACK command must be sent out except when getting preview data. The host can issue this command to request image data package with desired package ID after receiving Data command from CJP6380. The host should send this command with package ID F0F0h after receiving a package to end the package transfer. Note that the field “command ID” should be 00h when request image data package.

10.1 Command ID

The command with that ID is acknowledged by this command.

10.2 ACK Counter

No use.

10.3 Package ID

For acknowledging Data command, these two bytes represent the requested package ID. While for acknowledging other commands, these two bytes are set to 00h.

11. NAK (AA0Fh)

This command indicates corrupted transmission or unsupported features.

11.1 NAK Counter


No use.

11.2 Error Number

Picture Type Error	01h	Parameter Error	0bh
Picture Up Scale	02h	Send Register Timeout	0ch
Picture Scale Error	03h	Command ID Error	0dh
Unexpected Reply	04h	Picture Not Ready	0fh
Send Picture Timeout	05h	Transfer Package Number Error	10h
Unexpected Command	06h	Set Transfer Package Size Wrong	11h
SRAM JPEG Type Error	07h	Command Header Error	f0h
SRAM JPEG Size Error	08h	Command Length Error	f1h
Picture Format Error	09h	Send Picture Error	f5h
Picture Size Error	0ah	Send Command Error	ffh


Command Protocol

1. SYNC Command

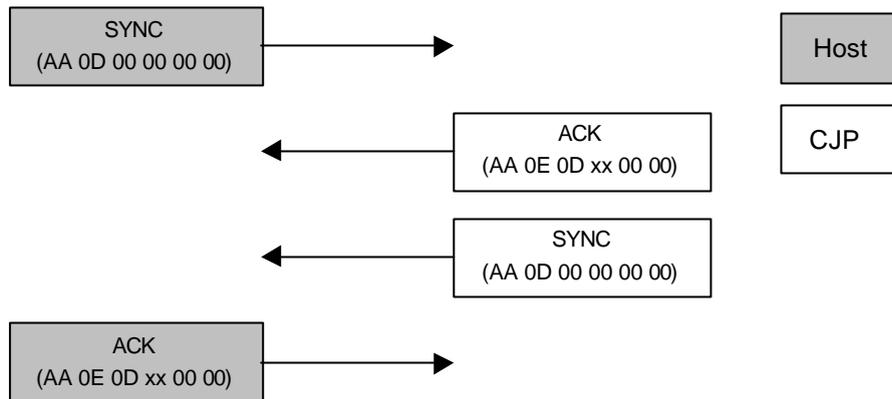


2. Make Connection with CJP6380


Send the SYNC command (at 14400bps) until receiving ACK command from CJP6380 (usually an ACK command is receive after sending 25 times of SYNC command). This must be done after power up.

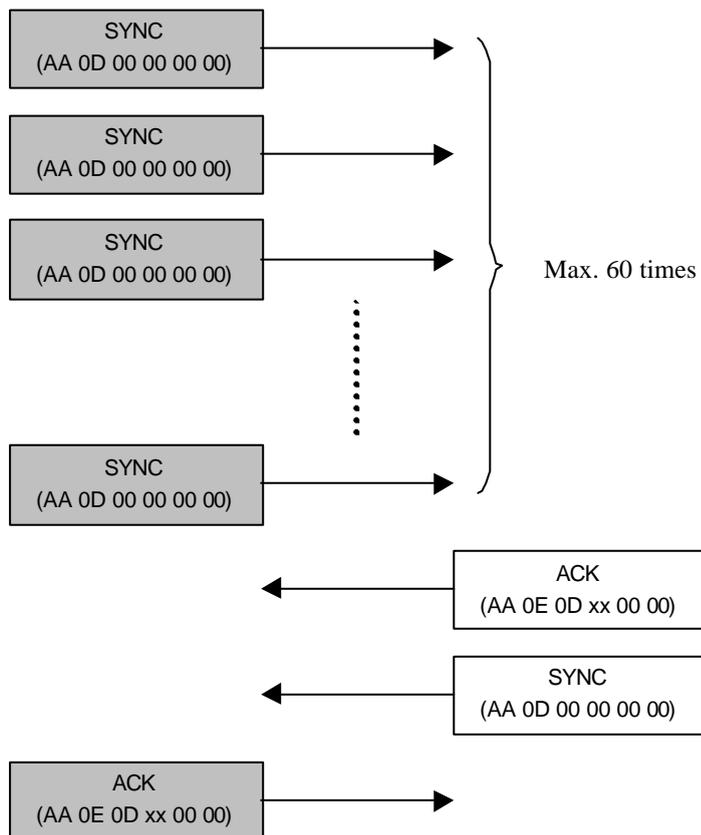

3. Initial, Get Picture, Snapshot, Set Package Size, Set Baudrate, Reset and Power Off Command

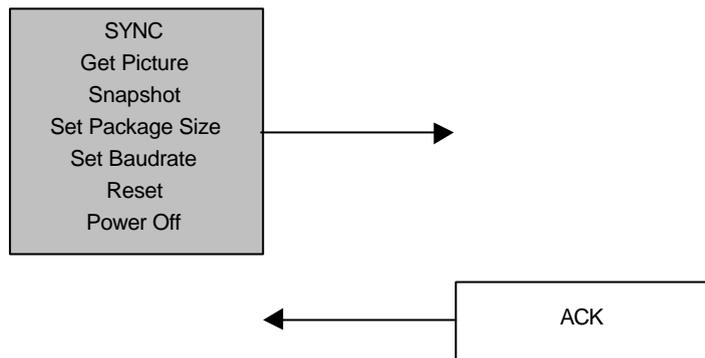

4. Getting a Snapshot JPEG Picture for RS232
Make sure connection is made before the following communication.

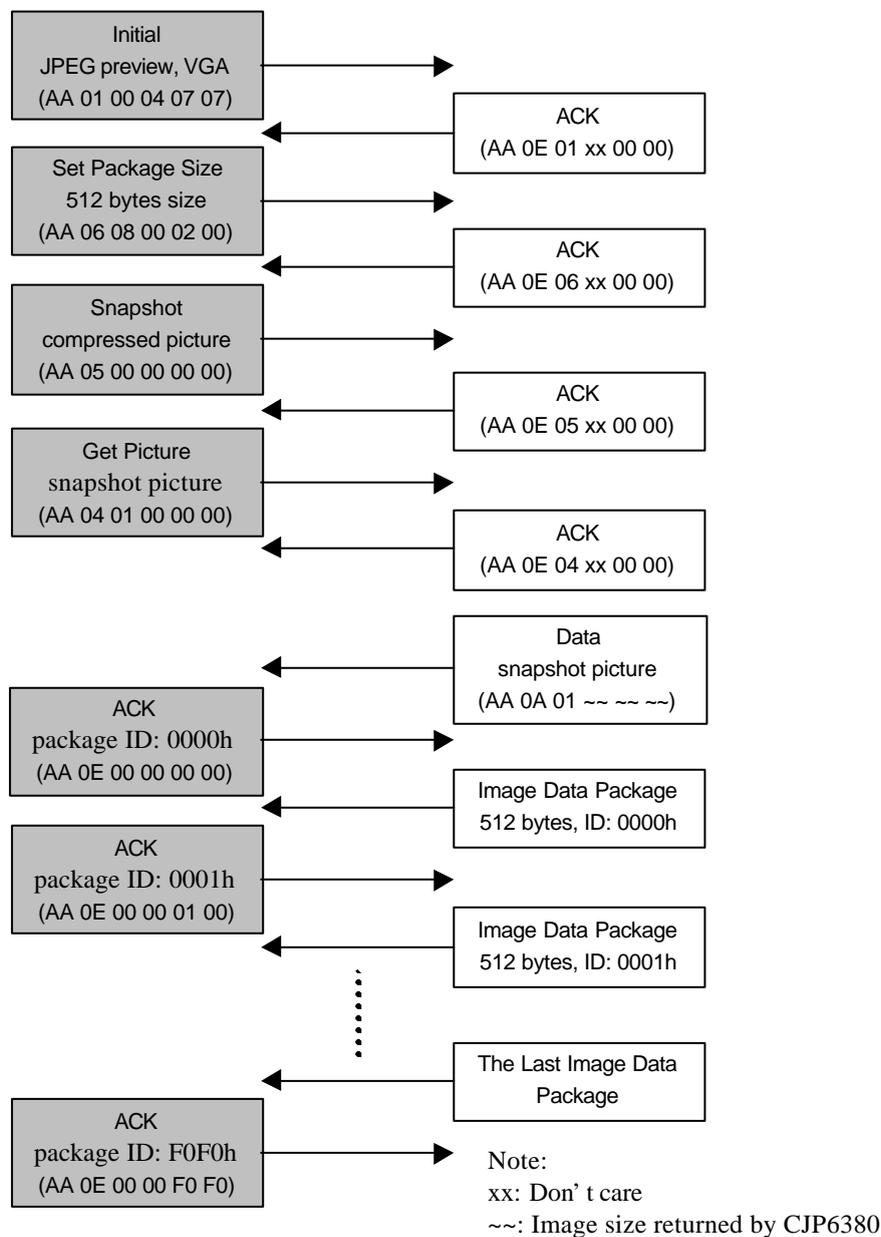

5. Getting JPEG preview pictures (video) for RS232
 Make sure connection is made before the following communication.

